









Item 名称	Specification 规格
Clear-span width 篷房跨度	30m/40m/50m
Eave height 屋檐高度	4m
Ridge height 屋脊高度	8.8m/10.3m/12.0m
Roof pitch 屋面坡度	18°
Bay distance 单元间距	5m
Longest component 最长部件	10.5m
Minimum tent length 最少起订	30m
Roof fixing 屋面固定	No limit 没有限制
Roof fixing 屋面固定	Bar tensioning 拉紧器
Main profile 主型材	300x120x5mm
Max. allowed wind speed 最高承受抗风	100km/hour 0.5kn/m ²
Eave/Ridge connection 屋檐/屋脊连接角	Hot-dip Galvanized steel insert 镀锌钢铁
Framework material 框架材料	Hard pressed extruded Aluminium 6061-T6 硬挤压铝合金 6061-T6 (13HW)
Cover material 屋面材料	Waterproof, fireproof (DIN4012 B1, M2), UV resistant 700-900g/m ² 防腐、防霉、抗紫外线、阻燃 (M2和B1) 等性能达到国际标准



Framework main profile dimension and use


框架主型材尺寸及使用

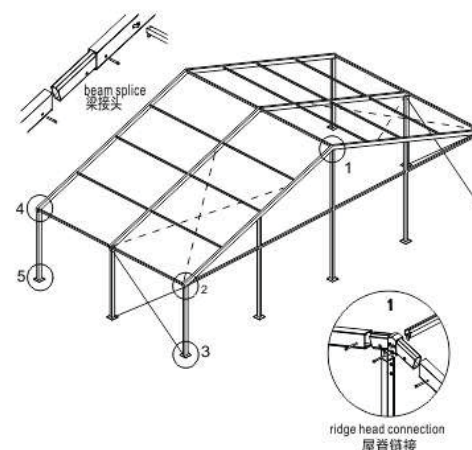


Roof Beam, Upright Support,
顶梁、立柱、



Gable pole
端面柱子



Gable pole
端面柱子




Eave Purlin, Gable pole, Ridge Purlin
屋檐梁、端面柱子、屋脊梁




Intermediate Purlin
屋面方管




Eave tension rail
屋檐方管、屋面方管、屋脊方管




ridge head connection
屋脊链接




eave corner
屋檐连接角



baseplate at the bracing connection
立柱、底座、斜支撑链接



eave corner
屋檐连接角



baseplate (field)
底座

Optional accessories

PVC window sidewalls	PVC侧边围布
Glass door units	玻璃门
Anchoring	膨胀螺丝
Transparent PVC cover and sidewall	透明PVC墙和墙壁
Rain Gutter	雨水槽
Flooring system	地台
Lining and curtain	窗帘和围幔
Weight plate	称重盘
Hard walling system	硬墙体系统
Glass walling system	玻璃墙系统

